

Série L une face à évacuation directe



Chef De File Dans L'Industrie Du Foyer Au Gaz



fire feature

The Art Of Fire Places

Série L une face à évacuation directe

Caractéristiques communes à tous les Modèles :

- Le foyer peut être installé en utilisant une gaine d'évacuation par-dessus ou par l'arrière pour une versatilité maximale.
- Le design simple ou affleuré de la façade permet l'installation de briques ou des carreaux au dessus l'encadrement du foyer.
- Design et technologie unique du brûleur style plateau.
- Stylisme classique contemporain pour s'ajuster à votre décor.
- Grande surface vitrée pour une vision spectaculaire de la flamme.
- Système simple de barrure de la porte pour un accès facile à la chambre de combustion.
- Système de contrôle HI/Lo pour l'ajustement du niveau de la flamme.
- Système d'allumage Piezo.
- Le système de contrôle Millivolt permet le fonctionnement continu même durant une panne de courant.
- Soupape de sécurité fiable à 100%.



L38DF avec des billes de verre.



L38DF avec des pierres de Rivière optionnelles.

Dégagements aux Combustibles			
	L38DF	L42DF	L52DF
Top (Rear Vent)*	9	9	9
Top (Top Vent)*	17 1/2	21	17 1/2
Sides	1	1	0
Floor	0	0	0
Back	1	2	1
Mantel	4	6	4

Dimensions de l'ossature					
	M	N	O	P	Q
L38DF	35 1/4	38	20 1/8	75	51 1/2
L42DF	36 1/2	41 1/2	22 5/8	82 7/8	58 5/8
L52DF	39	52	25	96 1/2	68 1/4

Dimensions Du Foyer													
	A	B	C	D	E	F	G	H	I	J	K	L	R
L38DF	37 3/4	29 1/2	34 3/4	1 1/4	18 1/4	1	18 1/2	35 3/4	11 1/2	5	8	21 3/4	4 1/4
L42DF	42	30 1/2	38 7/8	1 1/4	18 1/2	1	19 3/4	39 1/2	12 1/2	5	8	27	4 1/4
L52DF	52	33 1/4	47	2 1/2	21 1/4	1	22 1/2	49 1/4	13 1/2	5	8	26 1/2	4 1/4

Des options décoratives:

- Système de ventilateurs 150cfm à cage d'écureuil qui augmente la circulation de la chaleur. Le système est disponible avec contrôle optionnel activé par la chaleur et contrôle de vitesse variable.
- Allumage électronique avec système de sécurité par batterie et télécommande.
- Télécommande (on / off).
- Pierres de Rivière.

L38DF

- 26,000 BTU/H au gaz Naturel ou au Propane
- Dimension de la porte vitrée de 34 3/4" X 17 1/2"


L42DF

- 32,000 BTU/H au gaz Naturel ou au Propane
- Dimension de la porte vitrée de 39" X 18 1/2"


L52DF

- 40,000 BTU/H au gaz Naturel ou au Propane
- Dimension de la porte vitrée de 46 1/2" X 19 1/2"

Dimensions Du Foyer

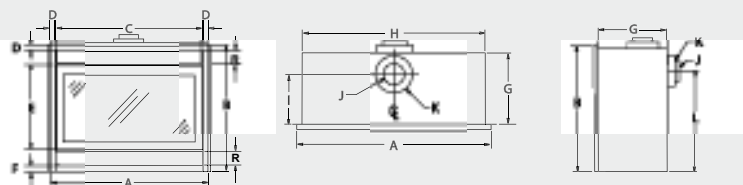

Dimensions de L'Encadrement

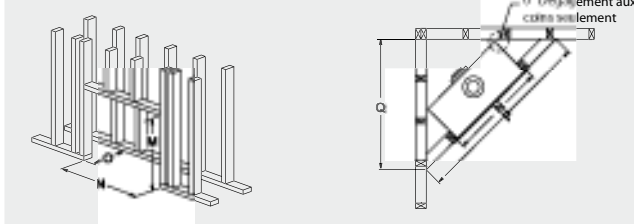

Consulter le manuel du propriétaire pour les instructions d'installation complètes et des dégagements aux surfaces combustibles avant de procéder à l'installation du foyer.

Garantie : Le manufacturier garantit le foyer contre tout défaut des matériaux et de main d'oeuvre au moment de la fabrication. Une garantie limitée de 10 ans couvre la chambre de combustion ; une garantie à 5 ans couvre le brûleur et une garantie de 1 an couvre la veilleuse, l'ensemble de bûches et les moteurs de ventilateur (si y compris). La soupape a une garantie limitée de 1 an à moins que le manuel du propriétaire le spécifie autrement. Les vitres, le placage, le fini peinturé et le revêtement réfractaire sont exempts de cette garantie.

La couleur et la disposition des flammes peuvent être légèrement différentes des illustrations. Les diagrammes et les illustrations se sont pas à l'échelle.



MONTIGO DELRAY CORP.

Part# XB0180F - 051407 - Imprimé au Canada

Langley, BC • Ferndale, WA
 Téléphone : (800) 378-3115 • Télécopieur : (866) 300-0927
 Courriel : fireplaces@montigo.com • Site Web : www.montigo.com

L52 See-Thru direct vent



an experienced leader in the gas fireplace industry



fire feature

The Art Of Fire Places

L52 See-Thru direct vent

Features:

- Fireplace installed using Top Vent
- Flush or Clean-Face Design allows for brick or tile installation over the fireplace frame
- Unique linear burner design and technology
- Classic contemporary styling to fit your decor
- Large viewing area for a full view of the spectacular fire
- Snap-Lock door system for tool free access inside the firebox
- Hi/Lo control for adjusting flame level
- Piezo spark ignition
- Millivolt control allows for continuous operation, even during a power failure
- 100% fail-safe shut-off valve



L52DF-ST with standard Glass Marbles.



L52DF-ST with optional River Rocks.


Design Options:

- 150-CFM squirrel-cage fan kit available to increase heat circulation. The kit is available with optional heat-activated control and variable speed control
- Factory installed electronic ignition with available battery backup and optional remote control.
- Wireless remote control (on/off only)
- Optional River Rocks

L52DF

- 40,000 BTU/H on Natural Gas
- 34,000 BTU/H on Propane
- 46" X 18 1/4" Glass Door Size

fireplace dimensions

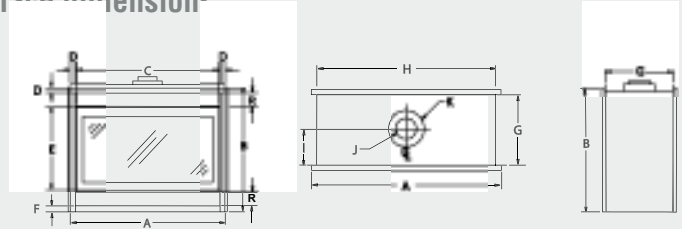


Fireplace Dimensions													
	A	B	C	D	E	F	G	H	I	J	K	L	R
L52DF-ST	52	33 1/4	47	2 1/2	21 1/4	I	22 1/2	49 1/4	13 1/2	5	8	26 1/2	4 1/4

framing dimensions

Clearance to Combustibles	
	L52DF-ST
Top (Top Vent)	17 1/2
Sides	0
Floor	0
Mantel	4

Framing Dimensions			
	M	N	O
L52DF-ST	39	52	23 7/8



Consult the owner's manual for complete installation instructions and proper clearances to combustible surfaces prior to installing fireplace.

Warranty: The manufacturer warrants this fireplace to be free from defects in materials and workmanship at the time of manufacture. There is a limited 10 year warranty on the firebox; 5 year limited warranty on the burner and 1 year limited warranty on the pilot burner assembly and fan motors (if included). The valve carries a limited 1 year warranty unless otherwise specified in the installation manual. Glass, plated/painted finishes and refractory lining are exempt.

All specifications, framing dimensions, product designs, materials and colors are subject to change without notice. The actual flame pattern and color may vary slightly from the illustrations. Diagrams and illustrations are not to scale.



power vented linear C-View



an experienced leader in the gas fireplace industry



fire feature

The Art Of Fire Places

power vented linear C-View



C-View Power Vented Fireplace

Fireplace Features

- Fireplace must be installed with Power Vent, consultation with the factory is required.
- Unique linear burner design and flame technology
- Enormous viewing area for a feature view of the flame.
- Electronic ignition
- 100% fail-safe shut-off valve

C420

- 100,000 BTU/H on Natural Gas & Propane

C520

- 100,000 BTU/H on Natural Gas & Propane

C620

- 120,000 BTU/H on Natural Gas

C720

- 140,000 BTU/H on Natural Gas

C820

- 150,000 BTU/H on Natural Gas

C920

- 175,000 BTU/H on Natural Gas

C1020

- 220,000 BTU/H on Natural Gas


C1120

- 230,000 BTU/H on Natural Gas

C1220



- 230,000 BTU/H on Natural Gas

fireplace dimensions

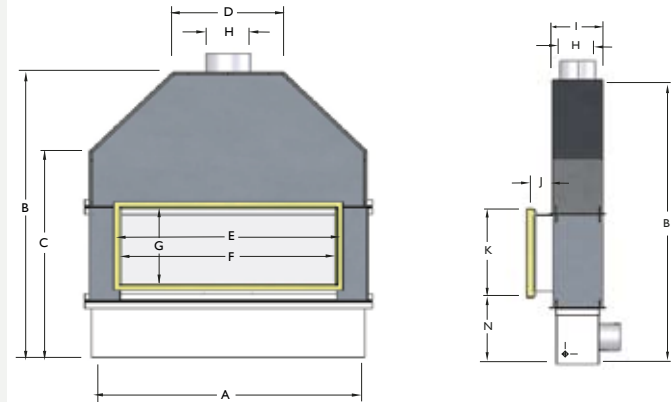

	A	B	C	D	E	F	G	H	I	J	K	L	M	N
C420	63½	58½	44½	24½	51	48	18	12	14	5½	21	3	3	14½
C520	75½	58½	44½	36½	63	60	18	12	14	5½	21	3	3	14½
C620	87½	58½	44½	48½	75	72	18	12	14	5½	21	3	3	14½
C720	99½	60½	46½	60½	87	84	20	12	14	5½	23	3	3	14½
C820	111½	60½	46½	46½	99	96	20	13	15	5½	23	1	2	14½
C920	123½	60½	46½	58½	111	108	20	13	15	5½	23	3	3	14½
C1020	135½	60½	46½	70½	123	120	20	13	15	5½	23	3	3	14½
C1120	147½	60½	46½	82½	135	132	20	13	15	5½	23	3	3	14½
C1220	159½	60½	46½	94½	147	144	20	13	15	5½	23	3	4¾	14½

framing dimensions

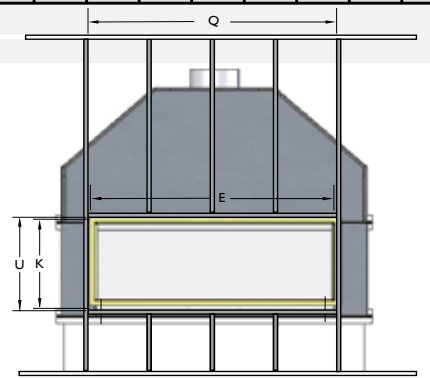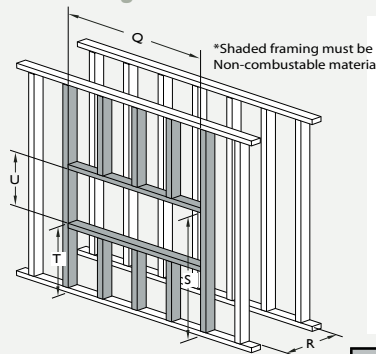

	Q	R	S	T	U	R*
C420	51½	21½	38½	15½	25½	21
C520	61½	21½	42½	16½	28½	21
C620	96½	21½	43½	15½	23½	21
C720	87½	21½	38½	15½	23½	21
C820	94½	19	30	12	18	21
C920	99½	21½	38½	15½	23½	21
C1020	123½	21½	41½	18	23½	21
C1120	141½	21½	41½	18	23½	21
C1220	141½	21½	45½	18	27½	21

R* When sheetrock is not used R may be reduced to this dimension

Consult the owner's manual for complete installation instructions and proper clearances to combustible surfaces prior to stalling fireplace.

Warranty The manufacturer warrants this fireplace to be free from defects in materials and workmanship at the time of manufacture. There is a limited 10 year warranty on the firebox; 5 year limited warranty on the burner and 1 year limited warranty on the pilot burner assembly and fan motors (if included). The valve carries a limited 1 year warranty unless otherwise specified in the installation manual. Glass, plated/painted finishes and refractory lining are exempt.

All specifications, framing dimensions, product designs, materials and colors are subject to change without notice. The actual flame pattern and color may vary slightly from the illustrations. Diagrams and illustrations are not to scale.



fire feature

MONTIGO DELRAY CORP.

Langley, BC • Ferndale, WA

Phone : (800) 378-3115 Fax: (866) 300-0927

Email: fireplaces@montigo.com • Website: www.montigo.com